


## Aluminized PET Film Coated Fiberglass Fabric / Cloth

### 1000°F / 537°C: AluMax™ Poly-Layered High Temperature & Radiant Heat Reflecting

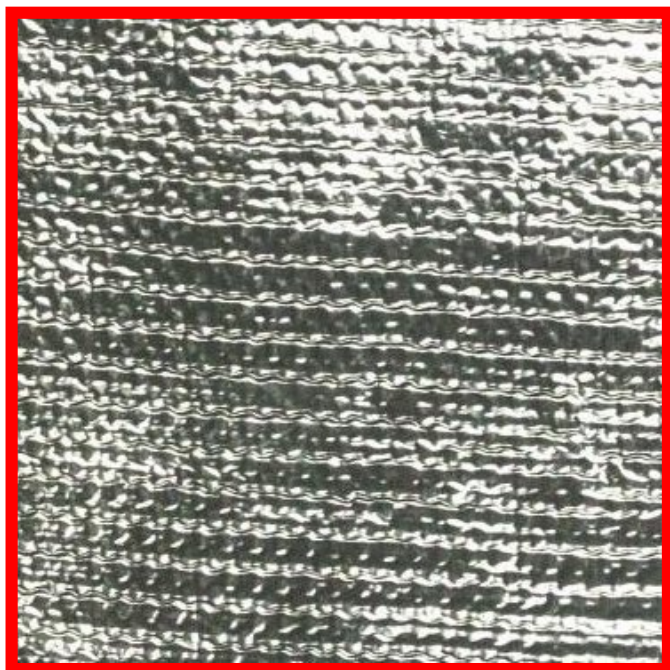

- Comprehensive line of radiant heat reflecting fabrics based on a poly-layered alu structure laminated to fiberglass base substrates. Excellent long-term flexibility.
- Protection from intense radiant heat up to 3000°F.
- Reflects more than 95% of the radiant heat that contacts its surface.
- 3 filament and 3 texturized base materials.
- Excellent radiant heat protection from sources such as super-hot metal slabs, proximity to liquid metal, infrared heaters, open flame / plasma or engine exhaust manifolds is a concern.
- Suitable for workwear fabrication with or without liner materials.

Poly-layered AluMax™ fabric offers protection when radiant heat from infrared sources such as super-hot metal slabs, proximity to liquid metal, open flame/plasma or engine exhaust manifolds is a concern. Constructed from a high-temperature base fabric which is then coated with heat reflective poly-layered aluminum. The base fabric is rated to 1000°F while the radiant capability of the fabric is 3000°F.

<b>AluMax™ Poly-Layered Aluminized Film Radiant Heat Reflective Protection Fabric</b>				
<b>Part Number</b>	<b>Weight oz/yd<sup>2</sup></b>	<b>Thickness in inches</b>	<b>Roll width in inches</b>	<b>Price per Linear Yard</b>
<b>Filament Fiberglass Base (plain &amp; satin weave)</b>				
F-FG-ALM-0960-8 (plain weave)	8	.009	60	£ 56.70
F-FG-ALM-0860-11 (satin weave)	11	.008	60	£ 61.96
F-FG-ALM-1760-15 (satin weave)	15	.017	60	£ 62.30
<b>Texturized Fiberglass Base (plain weave)</b>				
F-FG-ALM-2560-12.5 (plain weave)	12.5	.025	60	£ 49.40
F-FG-ALM-4060-22 (plain weave)	22	.040	60	£ 52.19
F-FG-ALM-6040-26 (plain weave)	26	.060	40	£ 57.07

- Full rolls are 50 yards / 150 feet / 45.7 metres long
- This Product is Available By-The-Yard Except Where Indicated
- Discounts for full roll purchases
- PSA adhesive coated on the back side is available