


Braided Fiberglass Vehicle Truck/Lorry/HGV Engine Exhaust Pipe Sleeve
1200°F / 648°C: Continuous Rating – Higher Temperature for Shorter Periods
BlackMax™ High Temperature & Heat Resistant

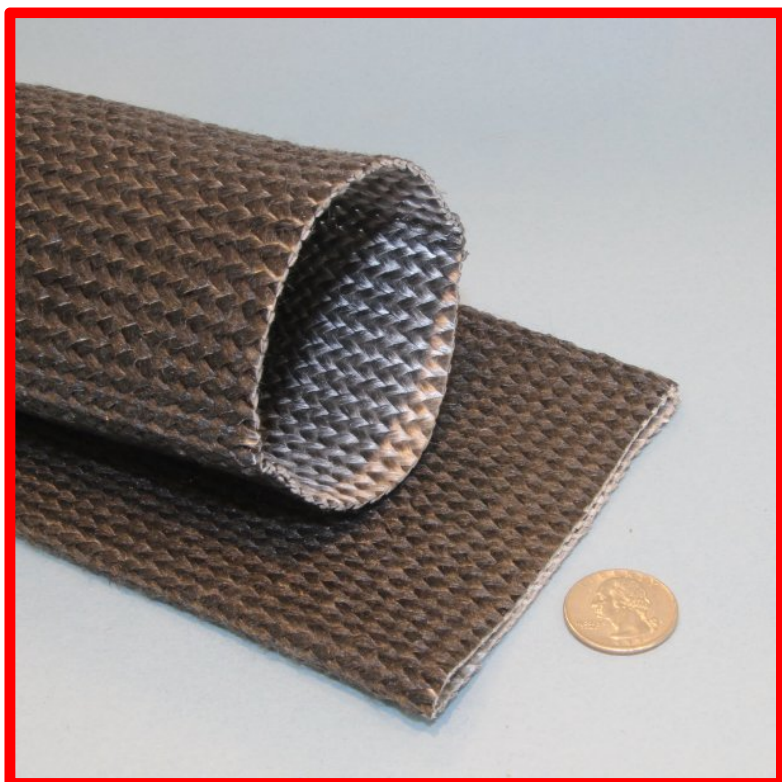

- 1/16" wall thickness
- Acrylic saturant added for enhanced ease of handling and anti-fray

Designed as a protection sleeve for truck/lorry/HGV & generator engine exhaust piping.

Easy to cut and maintains its end shape for ease of installation. Easily secured with stainless clamps.

Black colour hides dirt and grime contamination.

Protects Personnel from incidental contact burns.

Helps prevent fires due to spray from ruptured hydraulic or fuel supply lines contacting hot exhaust metal directly.

1200°F / 648°C continuous rating, high insulation value & excellent personnel protection

Very High-Temperature Braided Saturated Sleeve with Acrylic Saturant – Exhaust Pipe Protection Sleeve				
Part Number	Size in / mm / -dash			Price per foot
S-FG-BM-EX-M102-64	4.000	102	-64	£ 15.36
S-FG-BM-EX-M114-72	4.500	114	-72	£ 17.65
S-FG-BM-EX-M127-80	5.000	127	-80	£ 19.64

This Product is Available By The Foot